



GT SUCTION 86/BRZ

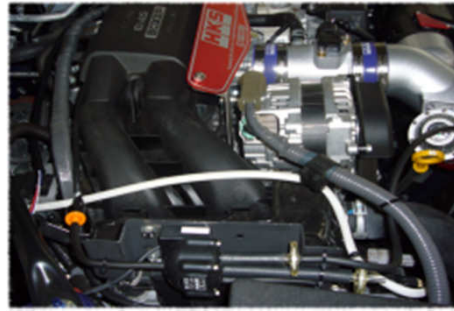

Engine Output

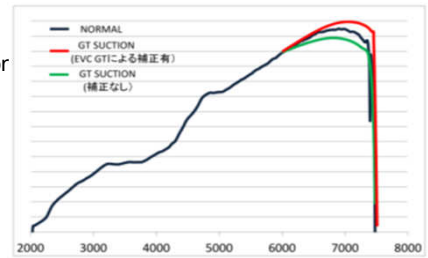

Features

Variable suction enables well-modulated sound between a factory suction and Racing Suction. "GT SUCTION" is a variable intake system to suit driving conditions. Butterfly valve is operated by a vacuum actuator for reliable and accurate control.

The EVC-GT controls valve opening between 1000-5500rpm.

By setting the valve programming correctly, performance is equivalent to Racing Suction.

Valve holder is included for simply and tidy mounting.

EVC-GT installation harness is available separately.



GT Suction


Vehicle	Model	Engine	Year	Main Unit Size	Code No.	Price
86 BRZ	DBA-ZN6 DBA-ZC6	FA20	2012/03 -	φ200-80	70025-AT001	

※"Super Hybrid Filter" is not included in this kit.

OECU Free Harness

•When installing GT Suction Valve Controller and/or electrical parts, installation can be done without damage to the stock ECU wiring.

※Do not take the power supply from this unit and/or red or black wires. If neglected, noise may occur in ECU which may cause malfunction.

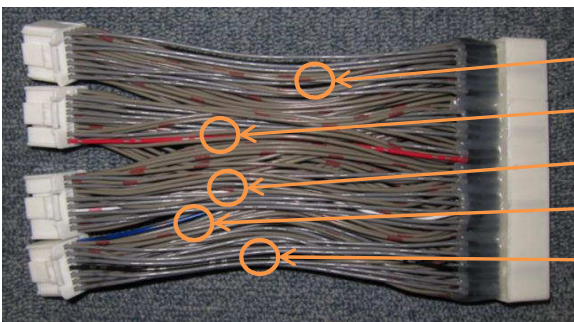

Purple: Airflow Output Wire

Red: 12V Power Source

White : Engine RPM

Blue: Throttle Position Signal

Black: Ground Wire (※)

Vehicle	Model	Engine	Year	Code No.	Price
86 BRZ	DBA-ZN6 DBA-ZC6	FA20	2012/03-	45999-AF004	